


F1B 7C-16

- Designed with a long narrow nose for excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- One hand latch for a faster reloading and reduced downtime
- Reversible bumper for high durability and increased parts life
- Rear exhaust with muffler for noise reduction, diverts air away from the operator and prevents the lubricant from soiling work surface
- Bottom loading magazine speeds the reloading and keeps out the dirt
- Magazine without any welded parts makes maintenance easier

TOOL TYPE

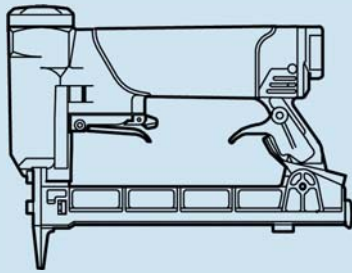

1B 7C-16

TOOL CHARACTERISTICS


| Height | Width | Length | Weight |
|-----------|-----------|-----------|----------|
| 157 mm | 42 mm | 218 mm | 780 g |
| 6.18 inch | 1.65 inch | 8.58 inch | 1.71 lbs |

Pressure 4 - 7 bar | 60 / 100 psi

Air consumption per shot 0.37 l
Performances at 90 psi / 6.2 bar (0.62 MPa)

Lubricant Aerospace Lubricants Tribolube 12

FASTENER DATA

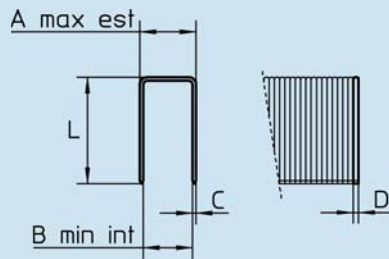

| | | |
|--------------------------|---|--------------------|
| A) Outside Crown | 9.00 mm | 0.354 inch |
| B) Inside Crown | 7.70 mm | 0.303 inch |
| CxD) Wire | 0.60 x 0.75 mm | 0.023 x 0.029 inch |
| L) Length | 6 - 16 mm | 1/4 - 5/8 inch |
| Magazine Capacity | 180 staples | |
| Staple Type | BeA 71, Senco 3G (=C), Atro 7, Bostitch 7 | |

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 89.02 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 79.70 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System* 1
(Safety : Manual)

Loading* Bottom Loading

*see instruction manual

APPLICATIONS

- garden furniture
- upholstery
- case backs
- kitchen units
- frame assembly
- mouldings and decorative trims
- baseboards
- boat interiors
- trade shows
- shoe making
- toys and dolls
- manufactured houses
- picture frames
- remodelling
- dust covers
- sofas
- insulation
- carpets and underlay
- vehicle panels
- labelling
- umbrellas
- brushes

FASCO S.R.L. Italy

Via B. Buoizzi 2

I - 40057 Cadriano di Granarolo (BO)

Tel. +39 051 / 60 181 | Fax +39 051 / 766 325

fasco@fasco-tools.com | www.fasco-tools.com

