




F1B 80-16 AUT. LONG MAGAZINE

- Possess the same performances as the Standard Version
- Extra long magazine for less reloading
- A **world-wide patented one trigger system** enables the operator to switch from simple shot to auto fire during the operation
- Fewer components in the valve area and its design, which offers an easy and trouble-free maintenance, make the tool robust and simple
- One hand control allows the operator to set the desired speed without leaving the hold on the tool with his hand
- Oversized metal cap and metal insert reduces vibrations and fatigue while keeping the max. speed (over 1.600 cycles per minute)

STAPLE TYPE

BeA 80, Senco AT, Atro 8, Haubold 800, Kihlberg 680

TOOL TYPE

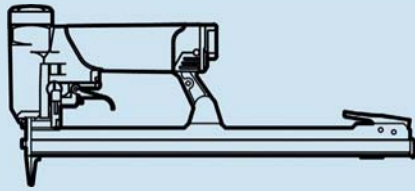

1B 80-16 AUT LM

TOOL CHARACTERISTICS


Height	Width	Length	Weight
167 mm	42 mm	376 mm	1370 g
6.57 inch	1.65 inch	14.80 inch	3.00 lbs

Pressure 5 - 7 bar | 70 / 100 psi

Air consumption per shot 0.17 l in aut.
Performances at 90 psi / 6.2 bar (0.62 MPa)

Lubricant Aerospace Lubricants Tribolube 12

FASTENER DATA

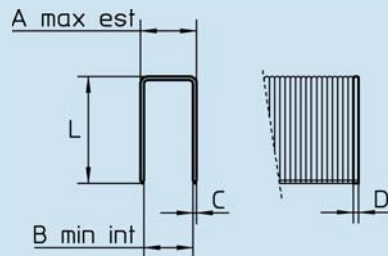

A) Outside Crown	12.80 mm	0.503 inch
B) Inside Crown	11.30 mm	0.444 inch
CxD) Wire	0.60 x 0.90 mm	0.023 x 0.035 inch
L) Length	8 - 16 mm	5/16 - 5/8 inch
Magazine Capacity	310 staples	
Staple Type	BeA 80, Senco AT, Atro 8, Haubold 800, Kihlberg 680	

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 92.12 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 81.30dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System* 5
(Safety : No)

Loading* Bottom Loading

*see instruction manual

APPLICATIONS

- upholstering
- sofas
- dust covers
- insulation



**WORLD-WIDE PATENTED:
ONE TRIGGER SYSTEM**

The new automatic design features a rapid valve controlled uniquely by the trigger itself. If the trigger is slightly depressed, the tool works in single shot system. By depressing the trigger fully, the tool switches over to the automatic firing sequence.

FASCO S.R.L. Italy

Via B. Buoizzi 2
I - 40057 Cadriano di Granarolo (BO)
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325
fasco@fasco-tools.com | www.fasco-tools.com

