


## F1B 97B-25

- Designed with a long narrow nose for excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- One hand latch for a faster reloading and reduced downtime
- Reversible bumper for high durability and increased parts life
- Rear exhaust with muffler for noise reduction, diverts air away from the operator and prevents the lubricant from soiling work surface
- Bottom loading magazine speeds the reloading and keeps out the dirt
- Magazine without any welded parts makes maintenance easier

## TOOL TYPE




1B 97B-25

## TOOL CHARACTERISTICS

Height	Width	Length	Weight
166 mm	42 mm	218 mm	895 g
6.53 inch	1.65 inch	8.58 inch	1.97 lbs

<b>Pressure</b>	4 - 7 bar   60 / 100 psi
<b>Air consumption per shot</b>	0.43 l Performances at 90 psi / 6.2 bar (0.62 MPa)
<b>Lubricant</b>	Aerospace Lubricants Tribolube 12

## FASTENER DATA

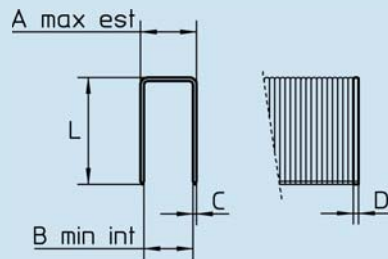

<b>A) Outside Crown</b>	4.60 mm	0.181 inch
<b>B) Inside Crown</b>	3.00 mm	0.118 inch
<b>CxD) Wire</b>	0.70 x 0.90 mm	0.027 x 0.035 inch
<b>L) Length</b>	12 - 25 mm	1/2 - 1 inch
<b>Magazine Capacity</b>	150 staples	
<b>Staple Type</b>	BeA 97, Bostitch SB97, Kihlberg 690, Prebena O, Spotnails 21	

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 87.77 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 78.60 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by UNI EN ISO 12100-1/2

## ACTUATION & LOADING

<b>Actuation System*</b>	1 (Safety : Manual)
<b>Loading*</b>	Bottom Loading

\*see instruction manual

## APPLICATIONS

- garden furniture
- upholstery
- case backs
- kitchen units
- frame assembly
- mouldings and decorative trims
- baseboards
- boat interiors
- trade shows
- shoe making
- toys and dolls
- manufactured houses
- picture frames
- remodelling
- dust covers
- sofas
- insulation
- carpets and underlay
- vehicle panels
- labelling
- umbrellas
- brushes

## FASCO S.R.L. Italy

Via B. Buoizzi 2  
I - 40057 Cadriano di Granarolo (BO)  
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325  
fasco@fasco-tools.com | www.fasco-tools.com

