




## F3C 90-40 LONG NOSE

- 25 mm long nose for an excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- Bottom loading magazine speeds the reloading and keeps out the dirt
- Two finger trigger delivers great control and reduces finger fatigue
- Driver threaded into the piston for a better resistance

## TOOL TYPE



3C 90-40

## TOOL CHARACTERISTICS


Height	Width	Length	Weight
245 mm	70 mm	260 mm	1.98 kg
9.64 inch	2.75 inch	10.23 inch	4.36 lbs

**Pressure** 4 - 7 bar | 60 / 100 psi

**Air consumption per shot** 0.88 l  
Performances at 90 psi / 6.2 bar (0.62 MPa)

**Lubricant** Aerospace Lubricants Tribolube 12

## FASTENER DATA

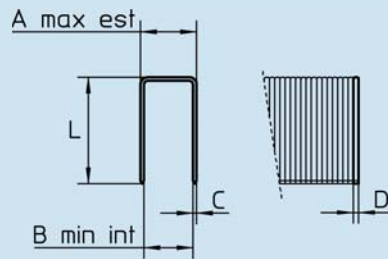

<b>A) Outside Crown</b>	5.70 mm	0.224 inch
<b>B) Inside Crown</b>	3.20 mm	0.125 inch
<b>CxD) Wire</b>	1.00 x 1.25 mm	0.039 x 0.049 inch
<b>L) Length</b>	20 - 40 mm	3/4 - 1 9/16 inch
<b>Magazine Capacity</b>	125 staples	
<b>Staple Type</b>	BeA 90, Duo-Fast 18, Haubold 6000, Senco N4450 (=L)	

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 90.52 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 86.10 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by  
UNI EN ISO 12100-1/2

## ACTUATION & LOADING

**Actuation System\*** 4  
(Safety : CT)

**Loading\*** Bottom Loading

\*see instruction manual

## APPLICATIONS

- garden furniture
- roofing shingles
- boxes and crates
- upholstery
- drawer guides
- case backs
- kitchen units
- frame assembly
- panels and profiled boards
- trade shows
- TV and HI-FI screens
- manufactured houses
- sofas
- insulation
- glue blocks
- latex panels
- shipping tags
- carton cases on pallets

### FASCO S.R.L. Italy

Via B. Buozzi 2  
I - 40057 Cadriano di Granarolo (BO)  
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325  
fasco@fasco-tools.com | www.fasco-tools.com

