

NEW!




F44AC G-50 TL

- Patent pending design with good ergonomics
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- Limited recoil resulting from balanced weight distribution
- Tool-less jam clearing mechanism provides an easy access to the nose if the staple jams
- Multi-directional exhaust adjusts without tools
- Includes a sequential fire / bump fire (Single Shot / Contact Trip) device, which is the safest in the world
- Depth control dial for precise countersinking
- Solid and durable design for the most demanding jobs

STAPLE TYPE

Senco G5562 (=N), Atrio 100, BeA 14/155

TOOL TYPE



44AC G-50 TL

TOOL CHARACTERISTICS


Height	Width	Length	Weight
310 mm	92 mm	345 mm	2.25 kg
12.20 inch	3.62 inch	13.58 inch	4.95 lbs

Pressure 5 - 7 bar | 70 / 100 psi

Air consumption per shot 1.16 l
Performances at 90 psi / 6.2 bar (0.62 MPa)

Lubricant Aerospace Lubricants Tribolube 12

FASTENER DATA

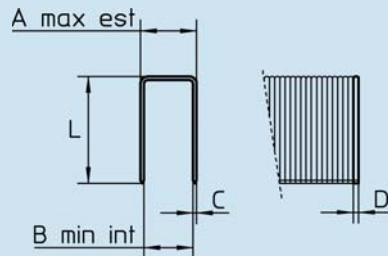

A) Outside Crown	11.10 mm	0.437 inch
B) Inside Crown	7.60 mm	0.299 inch
CxD) Wire	1.40 x 1.60 mm	0.055 x 0.062 inch
L) Length	25 - 50 mm	1 - 2 inch
Magazine Capacity	155 staples	
Staple Type	Senco G5562 (=N), Atro 100, BeA 14/155	

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 92.02 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 81.50 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

3.47 m/s²

ACTUATION & LOADING

Actuation System Single Shot and Contact Actuation

Loading Top Loading

APPLICATIONS

- sheathing
- furniture frames
- crate and box assembly
- subflooring
- pallets
- vinyl siding
- roof decking

FASCO S.R.L. Italy

Via B. Buoizzi 2
I - 40057 Cadriano di Granarolo (BO)
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325
fasco@fasco-tools.com | www.fasco-tools.com

